
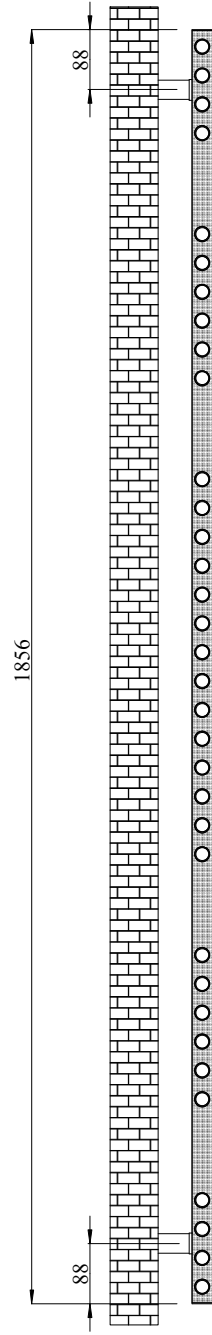
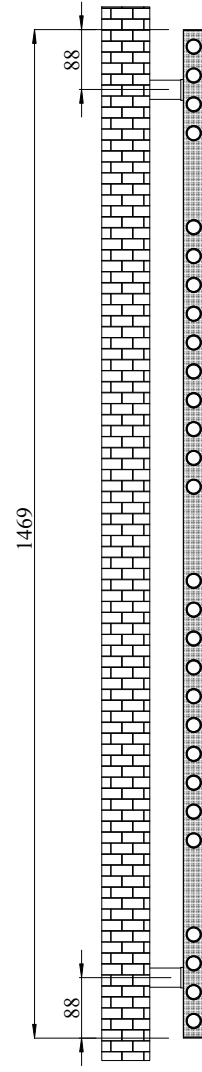
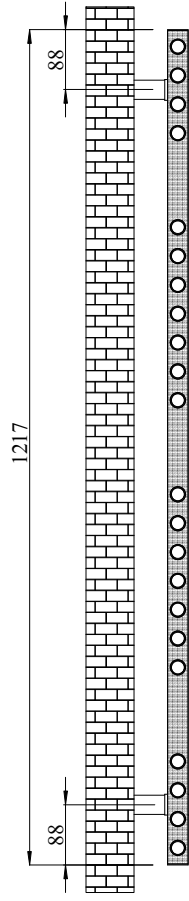
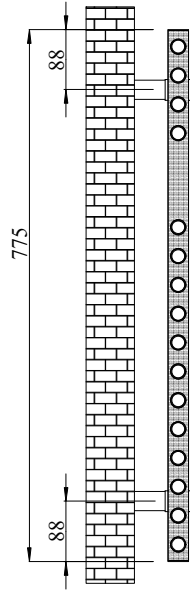
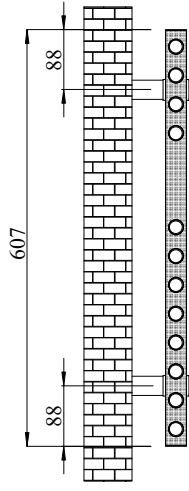
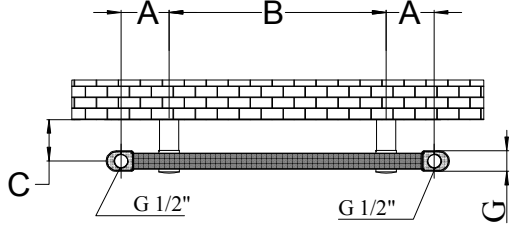


ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETORS.

HER HAKKI SAKLIDIR. YAZILI IZIN OLMADAN DÖKÜMLERİN HİÇ BİR KISMI KOPYA, KAYIT, BASIM VEYA DİĞER HERHANGİ BİR ŞEKİLDE ÇOĞALTILAMAZ VE YAYINLANAMAZ.

MODEL NAME : T-90

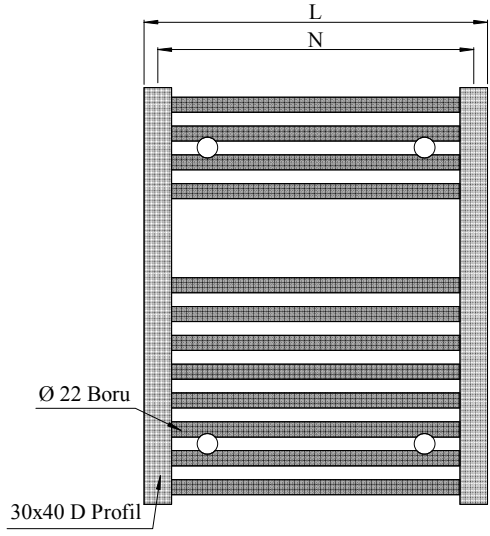

Model	Technical Data																
	Coating	H Height (mm)	L Length (mm)	N Connection (mm)	G (mm)	A (mm)	B (mm)	C (mm)	Number Of Tubes	M Weight (kg)	A Surface Area (m <sup>2</sup> )	V Volume (dm <sup>3</sup> )	P Heat Emission W 50K	Exponent n	P Bar	Logo	CE
T090-060-040	White	607	400	356	30	75	206	75-85	12	3,6	0,42	2,6	234	1,2236	10		ok
T090-060-050	White	607	500	456	30	75	306	75-85	12	4,2	0,49	2,9	280	1,2097	10		ok
T090-080-040	White	775	400	356	30	75	206	75-85	16	4,4	0,55	3,1	287	1,2267	10		ok
T090-080-045	White	775	450	406	30	75	256	75-85	16	5,3	0,59	3,4	326	1,1984	10		ok
T090-080-050	White	775	500	456	30	75	306	75-85	16	5,8	0,64	3,6	357	1,1971	10		ok
T090-080-055	White	775	550	506	30	75	356	75-85	16	6,2	0,7	3,9	389	1,1958	10		ok
T090-080-060	White	775	600	556	30	75	406	75-85	16	6,6	0,76	4,1	420	1,1944	10		ok
T090-120-040	White	1217	400	356	30	75	206	75-85	22	6,8	0,8	4,7	427	1,2349	10		ok
T090-120-045	White	1217	450	406	30	75	256	75-85	22	7,7	0,85	4,8	469	1,232	10		ok
T090-120-050	White	1217	500	456	30	75	306	75-85	22	8,3	0,93	5,2	511	1,2321	10		ok
T090-120-055	White	1217	550	506	30	75	356	75-85	22	8,9	1,01	5,6	553	1,2321	10		ok
T090-120-060	White	1217	600	556	30	75	406	75-85	22	9,6	1,08	5,9	595	1,2322	10		ok
T090-120-075	White	1217	750	706	30	75	556	75-85	22	11,4	1,3	7	721	1,2324	10		ok
T090-150-040	White	1469	400	356	30	75	206	75-85	28	8,4	1	5,8	527	1,2384	10		ok
T090-150-045	White	1469	450	406	30	75	256	75-85	28	9,6	1,06	6	576	1,236	10		ok
T090-150-050	White	1469	500	456	30	75	306	75-85	28	10,4	1,16	6,5	629	1,2356	10		ok
T090-150-055	White	1469	550	506	30	75	356	75-85	28	11,2	1,25	6,9	683	1,2351	10		ok
T090-150-060	White	1469	600	556	30	75	406	75-85	28	11,9	1,35	7,4	737	1,2346	10		ok
T090-150-075	White	1469	750	706	30	75	556	75-85	28	14,3	1,64	8,7	899	1,2333	10		ok
T090-180-040	White	1856	400	356	30	75	206	75-85	34	10,4	1,23	7,1	652	1,2392	10		ok
T090-180-045	White	1856	450	406	30	75	256	75-85	34	12	1,3	7,4	719	1,2401	10		ok
T090-180-050	White	1856	500	456	30	75	306	75-85	34	12,8	1,42	8	786	1,2393	10		ok
T090-180-055	White	1856	550	506	30	75	356	75-85	34	13,7	1,54	8,5	854	1,2385	10		ok
T090-180-060	White	1856	600	556	30	75	406	75-85	34	14,6	1,66	9,1	922	1,2376	10		ok
T090-180-075	White	1856	750	706	30	75	556	75-85	34	17,3	2,01	10,7	1125	1,2362	10		ok
T090C-060-040	Chrome	607	400	356	30	75	206	75-85	12	3,6	0,42	2,6	151	1,2664	10		ok
T090C-060-050	Chrome	607	500	456	30	75	306	75-85	12	4,2	0,49	2,9	182	1,2599	10		ok
T090C-080-040	Chrome	775	400	356	30	75	206	75-85	16	4,4	0,55	3,1	186	1,2714	10		ok
T090C-080-045	Chrome	775	450	406	30	75	256	75-85	16	5,3	0,59	3,4	206	1,295	10		ok
T090C-080-050	Chrome	775	500	456	30	75	306	75-85	16	5,8	0,64	3,6	229	1,2792	10		ok
T090C-080-055	Chrome	775	550	506	30	75	356	75-85	16	6,2	0,7	3,9	252	1,2634	10		ok
T090C-080-060	Chrome	775	600	556	30	75	406	75-85	16	6,6	0,76	4,1	274	1,2476	10		ok
T090C-120-040	Chrome	1217	400	356	30	75	206	75-85	22	6,8	0,8	4,7	278	1,2845	10		ok
T090C-120-045	Chrome	1217	450	406	30	75	256	75-85	22	7,7	0,85	4,8	303	1,2987	10		ok
T090C-120-050	Chrome	1217	500	456	30	75	306	75-85	22	8,3	0,93	5,2	331	1,2927	10		ok
T090C-120-055	Chrome	1217	550	506	30	75	356	75-85	22	8,9	1,01	5,6	360	1,2866	10		ok
T090C-120-060	Chrome	1217	600	556	30	75	406	75-85	22	9,6	1,08	5,9	388	1,2805	10		ok
T090C-120-075	Chrome	1217	750	706	30	75	556	75-85	22	11,4	1,3	7	473	1,2624	10		ok
T090C-150-040	Chrome	1469	400	356	30	75	206	75-85	28	8,4	1	5,8	346	1,2856	10		ok
T090C-150-045	Chrome	1469	450	406	30	75	256	75-85	28	9,6	1,06	6	368	1,2996	10		ok
T090C-150-050	Chrome	1469	500	456	30	75	306	75-85	28	10,4	1,16	6,5	406	1,2943	10		ok
T090C-150-055	Chrome	1469	550	506	30	75	356	75-85	28	11,2	1,25	6,9	443	1,289	10		ok
T090C-150-060	Chrome	1469	600	556	30	75	406	75-85	28	11,9	1,35	7,4	481	1,2838	10		ok
T090C-150-075	Chrome	1469	750	706	30	75	556	75-85	28	14,3	1,64	8,7	593	1,2679	10		ok
T090C-180-040	Chrome	1856	400	356	30	75	206	75-85	34	10,4	1,23	7,1	432	1,2972	10		ok
T090C-180-045	Chrome	1856	450	406	30	75	256	75-85	34	12	1,3	7,4	468	1,3005	10		ok
T090C-180-050	Chrome	1856	500	456	30	75	306	75-85	34	12,8	1,42	8	514	1,2954	10		ok
T090C-180-055	Chrome	1856	550	506	30	75	356	75-85	34	13,7	1,54	8,5	559	1,2903	10		ok
T090C-180-060	Chrome	1856	600	556	30	75	406	75-85	34	14,6	1,66	9,1	604	1,2853	10		ok
T090C-180-075	Chrome	1856	750	706	30	75	556	75-85	34	17,3	2,01	10,7	741	1,2701	10		ok